

(SD2022-255) A robust approach to camera radar fusion

Tech ID: 33849 / UC Case 2021-Z08-1

ABSTRACT

Researchers from UC San Diego have developed RadSenNet, a new approach of sequential fusing of information from radars and cameras. The key idea of sequential fusion is to fundamentally shift the center of focus in radar-camera fusion systems from cameras to radars. This shift enables their invention (RadSegNet) to achieve all-weather perception benefits of radar sensing. Keeping radars as the primary modality ensures reliability in all situations including occlusions, longrange and bad weather.

TECHNOLOGY DESCRIPTION

Perception systems for autonomous driving have seen significant advancements in their performance over last few years. However, these systems struggle to show robustness in extreme weather conditions because sensors like lidars and cameras, which are the primary sensors in a sensor suite, see a decline in performance under these conditions. In order to solve this problem, camera-radar fusion systems provide a unique opportunity for all weather reliable high quality perception. Cameras provides rich semantic information while radars can work through occlusions and in all weather conditions. In this work we show that the state-of-the-art fusion methods perform poorly when camera input is de-graded, which essentially results in losing the all-weather reliability they set out to achieve.

Researchers from UC San Diego have developed RadSenNet, a new approach of sequential fusing of information from radars and cameras. The key idea of sequential fusion is to fundamentally shift the center of focus in radar-camera fusion systems from cameras to radars. This shift enables their invention (RadSegNet) to achieve all-weather perception benefits of radar sensing. Keeping radars as the primary modality ensures reliability in all situations including occlusions, longrange and bad weather.

RadSegNet architects the sequential fusion by decoupling the simultaneous feature extraction from both the cameras and radars, used in state-of-art architectures. Instead, features are sequentially extracted first from the camera and then propagated to radar point clouds, thus retaining reliable

CONTACT

University of California, San Diego
Office of Innovation and
Commercialization
innovation@ucsd.edu
tel: 858.534.5815.



OTHER INFORMATION

KEYWORDS

Computer Vision, Pattern Recognition

CATEGORIZED AS

- ▶ **Communications**
 - ▶ Optical
 - ▶ Other
 - ▶ Wireless
- ▶ **Imaging**
 - ▶ Other
- ▶ **Transportation**
 - ▶ Automotive

RELATED CASES

2021-Z08-1

radar inputs at all times along with a hint of semantic information from cameras. This is the first technology that performs all-weather reliable sensor fusion of radar point clouds and camera images, at long ranges, while keeping radars as the primary sensing modality.

A fusion between the camera and radar modalities can be performed in multiple ways. Some approaches do late fusion, wherein individual detections from multiple modalities are combined, but, here, we can not learn any joint representation or perform joint feature extraction. Alternatively, there exist early fusion approaches that work in two ways. Some works project radar points to camera perspective view RGB image, but operating in perspective view makes it harder to distinguish between small objects close to the sensor and large objects at a longer range. Others perform an inverse mapping of the camera's RGB image to radar's Bird's eye view (BEV) but an inverse mapping of the camera to BEV plane is ill-defined due to the lack of depth information in-camera images.

To solve the problems in late and early fusion techniques, the state-of-the-art approaches perform middle fusion or feature-level fusion. These approaches use multi-view feature aggregation from radar and image data. For a particular object region proposal, features are fused from radar point clouds and camera images simultaneously. Unfortunately, it turns out that this simultaneous feature extraction approach for camera and radar fusion has a heavy reliance on cameras. The performance severely degrades in cases where the camera input is degraded, like in bad weather conditions. We propose a new fusion method, that treats Radars as the primary sensor which truly achieves all-weather reliability, essentially solving all the problems mentioned above.

APPLICATIONS

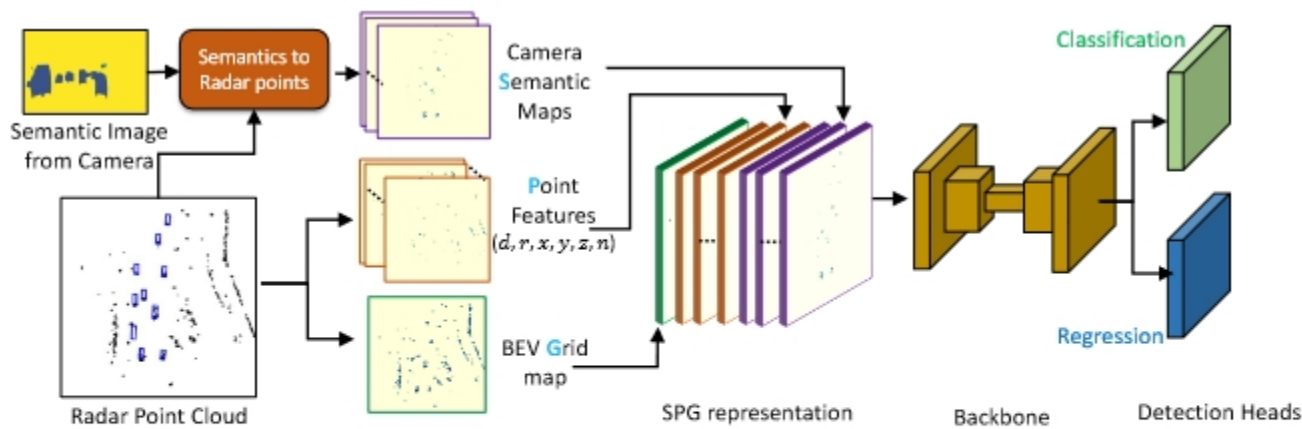


Fig. 2. Overview RadSegNet: Our approach utilizes encodings from our SPG module to detect objects. The encodings are generated from the semantic features from a semantic segmentation network along with radar point-based features and an occupancy grid. These encoded maps are concatenated and passed through the bounding box detection network.

ADVANTAGES

STATE OF DEVELOPMENT



- (51) International Patent Classification:
G06V 10/80 (2022.01) *G06N 3/02* (2006.01)
G06T 7/10 (2017.01)
- (21) International Application Number:
PCT/US2023/070101
- (22) International Filing Date:
13 July 2023 (13.07.2023)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
63/389,687 15 July 2022 (15.07.2022) US
- (71) Applicant: **THE REGENTS OF THE UNIVERSITY OF CALIFORNIA** [US/US]; 1111 Franklin Street, 5th Floor, Oakland, California 94607 (US).
- (72) Inventors: **BANSAL, Kshitiz**; 3869 Miramar Street #1229, La Jolla, California 92037 (US). **RUNGTA, Keshav**; 10300 North Torrey Pines Rd., 3rd Floor, La Jolla, California 92037 (US). **BHARADIA, Dinesh**; 10300 North Torrey Pines Rd., 3rd Floor, La Jolla, California 92037 (US).
- (74) Agent: **STEVEN P. FALLON**; Greer, Burns & Crain, Ltd., 300 South Wacker Drive, Suite 2500, Chicago, Illinois 60606 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,

(54) Title: IMAGE AND DEPTH SENSOR FUSION METHODS AND SYSTEMS

INTELLECTUAL PROPERTY INFO

This patent-pending technology is available for commercialization.

<https://patentimages.storage.googleapis.com/a3/d6/44/730944908274af/WO2024015891A1.pdf>

RELATED MATERIALS

- Kshitiz Bansal, Keshav Rungta, Dinesh Bharadia RadSegNet: A Reliable Approach to Radar Camera Fusion - 07/22/2022

University of California, San Diego
Office of Innovation and Commercialization
9500 Gilman Drive, MC 0910, ,
La Jolla, CA 92093-0910

Tel: 858.534.5815
innovation@ucsd.edu
<https://innovation.ucsd.edu>
Fax: 858.534.7345

© 2024, The Regents of the
University of California
[Terms of use](#)
[Privacy Notice](#)