



# Free-Standing Ni-Nio Nanofiber Cloth Anode For High Capacity And High Rate Li-Ion Batteries

Tech ID: 32655 / UC Case 2016-183-0

## PATENT STATUS

Country	Type	Number	Dated	Case
United States Of America	Issued Patent	11,211,598	12/28/2021	2016-183


## FULL DESCRIPTION

### Background

To meet market demand for cost effective, safe and high-performance Lithium-Ion batteries (LIB), researchers continue to pursue novel materials with varied nanostructures. LIB electrodes often consist of conductive additives, binder, current collector and active material. A free standing electrode incorporates the current collector into the electrode architecture thereby eliminating the need for binders or conductive additives. Replacements for graphitic anode include metals such as Silicon, Tin, other transitional metals and Lithium metal. Silicon, Tin and other transition metal oxides suffer from large volume expansions during charge/discharge causing degradation of the electrode. Nickel Oxide (NiO) is a promising candidate for anode but endures similar volume expansion limiting its potential.

### Current Invention

Research team led by Profs. Gengiz and Mihrimah Ozkan, at UCR, have developed a patented and proven, Ni-NiO nanofiber cloth electrode that is synthesized by electrospinning and processed by simple heat treatments which addresses the challenges described above.

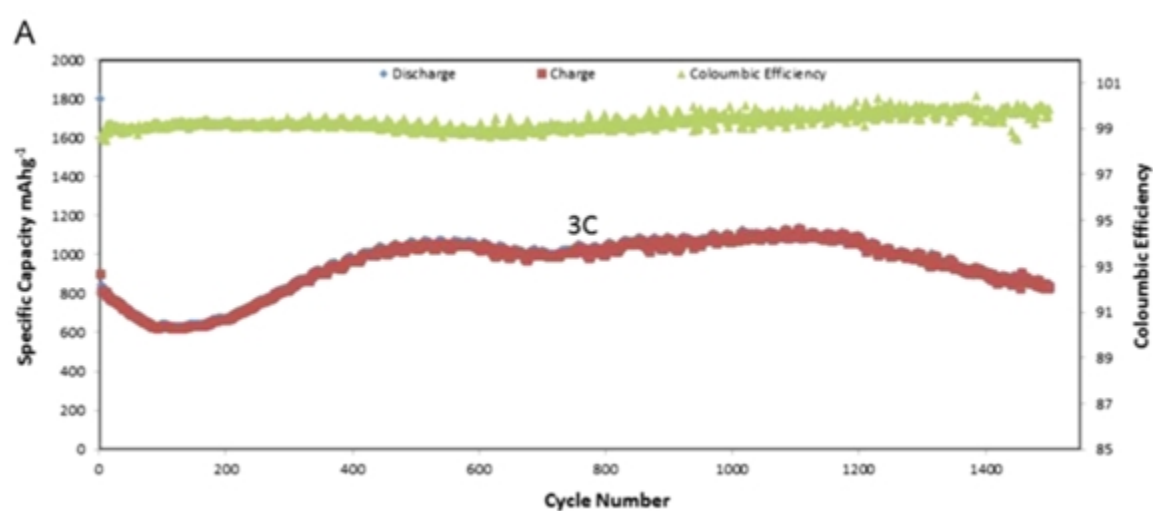

Deep Galvanostatic cycling data at 3C for more than 1000 cycles.

## CONTACT

Venkata S. Krishnamurty  
[venkata.krishnamurty@ucr.edu](mailto:venkata.krishnamurty@ucr.edu)  
 tel: .

## OTHER INFORMATION

### KEYWORDS


Ni-Nickel Oxide Anode, Nickel Oxide  
 Nanofiber, Lithium-ion battery,  
 Electrospinning, Rechargeable  
 battery, Energy storage, Lithium  
 Battery Anode

### CATEGORIZED AS

- ▶ **Energy**
  - ▶ Storage/Battery
- ▶ **Materials & Chemicals**
  - ▶ Nanomaterials
- ▶ **Nanotechnology**
  - ▶ Materials
- ▶ **Transportation**
  - ▶ Automotive

### RELATED CASES

2016-183-0

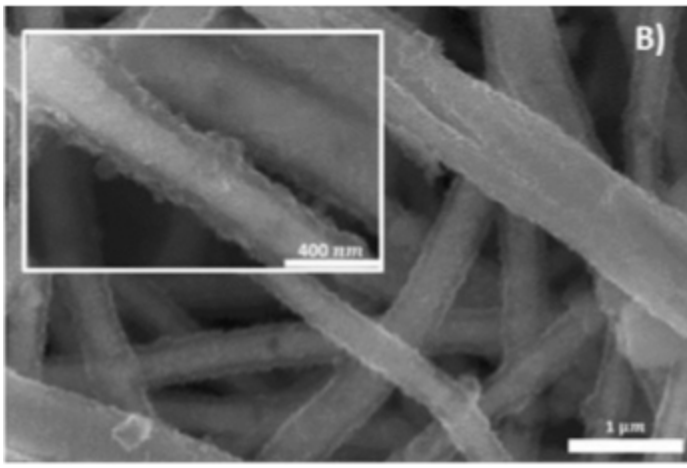

Scanning electron microscopy image of Ni-NiO fiber after 400 cycles at 3C.

## ADVANTAGES

The benefits of their innovation and discovery are:

- ▶ High capacity and long cycle life.
- ▶ Fast cycling rates of 3C – very valuable and desired for fast charging of electric vehicles.
- ▶ Minimal changes in morphology post cycling after 1,500 cycles at 3C rates.
- ▶ Low temperature processing results in smaller grain sizes which facilitates the formation of a polymer gel-like material which supports longer cycle life and minimal morphology changes.
- ▶ The electrodes' Nickel backbone prevents damage caused by mechanical stress due to volume changes.

## STATE OF DEVELOPMENT

Lab level prototype built and tested.

The team fabricated 2032 type coin cells to test the performance of the Ni-NiO anodes. The results are impressive with a high capacity of 1108 mAh/gram after 1,500 cycles at a fast cycling rate of 3C and coulombic efficiency greater than 99%.

## SUGGESTED USES

- ▶ Lithium-ion battery anode
- ▶ Rechargeable energy storage

## RELATED MATERIALS

- ▶ [Free-standing Ni-NiO nanofiber cloth anode for high capacity and high rate Li-ion batteries](#)

**University of California, Riverside**  
**Office of Technology Commercialization**  
200 University Office Building,  
Riverside, CA 92521  
[otc@ucr.edu](mailto:otc@ucr.edu)  
[research.ucr.edu/](http://research.ucr.edu/)